

COMPACTORS

Stationary Compactor RP-200 thru RP-400



RP-300 SHOWN


FEATURING:

- UL Listed Relay Control Box
- Electrical Motor - TEFC (Tri-Voltage)
- Meets ANSI Standards
- Controls: Push button start, dead man/hand key switch, forward-reverse selection switch, mushroom emergency stop, 80% / 100% container full light and manual override all standard
- Grease Fittings (2 per side)
- All compactors are primed and painted in one of ten standard colors
- Oil Level Site Gauge with Thermometer
- Operator Controls with 15' Sealtite
- Hydraulic Power Unit mounted internally (RP-200 and RP-300 Only)
- Options Available

ALL PRODUCTS ARE BUILT RUDCO TOUGH IN THE USA

COMPACTORS

Stationary Compactor

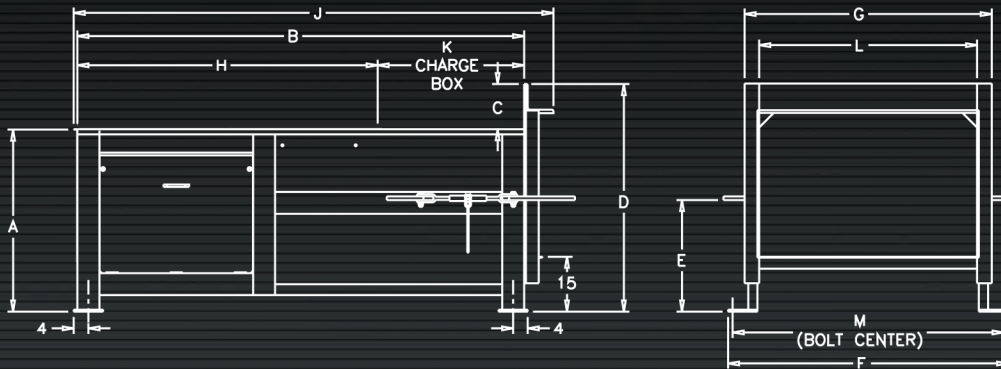

Stationary Compactor Specifications

	RP-200	RP-300	RP-400
MFG. RATING	2.0 CUBIC YARDS	3.0 CUBIC YARDS	3.44 CUBIC YARDS
NSWMA RATING	1.56 CUBIC YARDS	2.05 CUBIC YARDS	2.97 CUBIC YARDS
CYCLE TIME	63 SEC.	57 SEC.	54 SEC.
NORMAL RAM FORCE	48,000	48,042	52,200
MAXIMUM RAM FORCE	56,500	56,520	61,400
NORMAL OPERATING PRESSURE	1700	1700	1700
MAXIMUM OPERATING PRESSURE	2000	2000	2000
CYLINDER (BORE x STROKE X ROD)	6" x 56" x 3"	6" x 66" x 3"	6" X 80" X 4-1/2"
MOTOR	10 HP	10 HP	15 HP
PUMP SIZE	10.5 GPM	10.5 GPM	15 GPM
PACKER FLOOR	1/2" PLATE	1/2" PLATE	1/2" PLATE
PACKER SIDES	1/4" PLATE w/ 6" CHANNEL	1/4" PLATE w/ 6" CHANNEL	1/4" PLATE w/4"x 3" ANGLE
RAM TOP	1/4" PLATE	1/4" PLATE	1/4" PLATE
RAM FACE	3/8" PLATE w/ 4" x 3" ANGLE	3/8" PLATE w/ 4" x 3" ANGLE	1/2" PLATE w/ 4" x 3" ANGLE
CHARGE BOX OPENING	40" x 60"	50" x 60"	60" x 69"
DIMENSION - A	49-7/8"	49-7/8"	54-1/2"
DIMENSION - B	123-1/2"	141-1/2"	182"
DIMENSION - C	12-1/2"	12-1/2"	8"
DIMENSION - D	62-3/8"	62-3/8"	62-3/8"
DIMENSION - E	30-1/2"	30-1/2"	31"
DIMENSION - F	76-1/2"	76-1/2"	76-1/2"
DIMENSION - G	68"	68"	68"
DIMENSION - H	80-1/4"	88-1/4"	112"
DIMENSION - J	131"	149"	189"
DIMENSION - K	41"	51"	69-1/2"
DIMENSION - L	60"	60"	60"
DIMENSION - M	67-1/2"	67-1/2"	67-1/2"
APPROXIMATE WEIGHT	5,830	6,130	8,400

01/09 #124